




	BURNISHING	ELECTROLYTIC GALV.	HOT DIP GALVANISING	NICKEL PLATING COATING	CHEMICAL NICKEL PLATING
	TEMPERING	INDUCTION QUENCHING	OIL QUENCHING	CEMENTATION	
TRATTAMENTI SUPERFICIALI O TERMICI					
	RAL 9010 - WHITE	RAL 2004 - ORANGE	RAL 9006 - ALLUMINIUM	RAL 6017 - GREEN	RAL 8011 - BROWN
	RAL 1021 - YELLOW	RAL 5007 - BLUE	RAL 9011 - BLACK	RAL1021-YELLOW/RAL9011-BLACK	
VERNICIATURA					

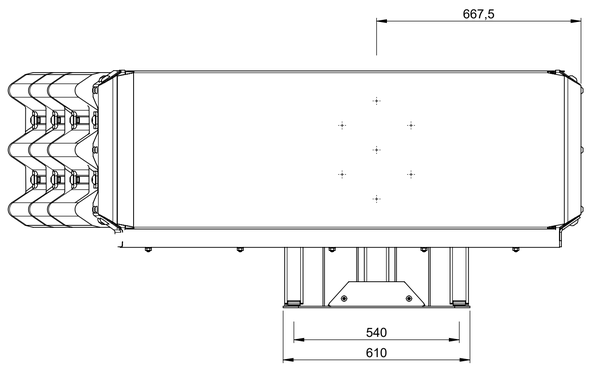

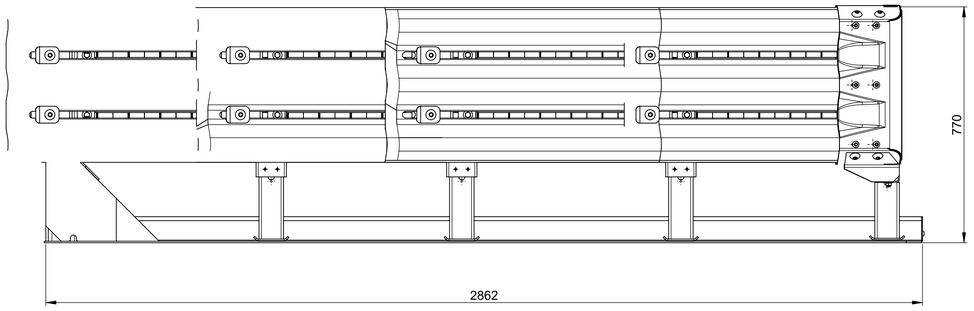

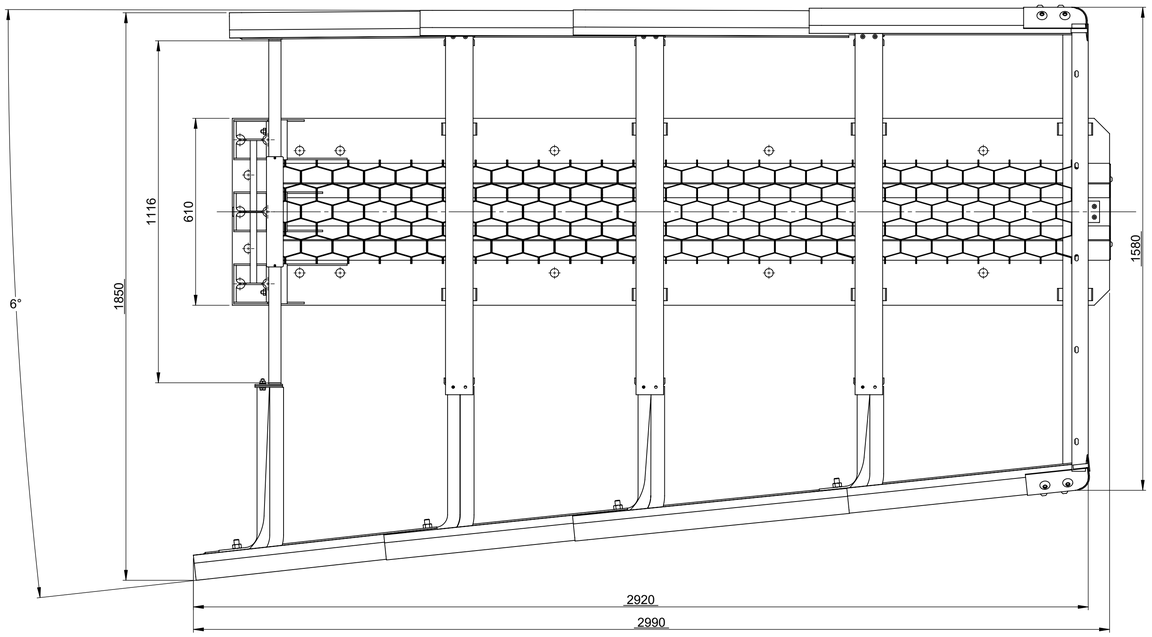

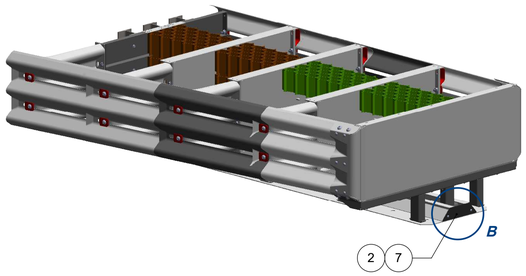

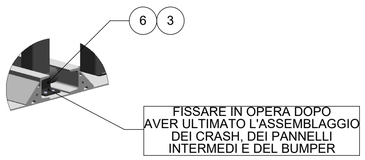

DETTAGLIO B

Pos.	Q.ty	Description	Dimension	Length	ID
8	1	SMA 80 SW-L-L No base			D56270100
7	1	Sheet for clousure guide			D44630002
6	1	Support angular			D42380008
5	1	Base SMA 80			D42380001-T1
4	1	TSEI SCREWS UNI 5933 10.9 A2	M3x8		3000019747
3	2	HEX SOCKET BUTTON HEAD SCREW UNI EN ISO 7380 PG 10.9 ZL	M8x10		3000019745
2	2	HEX SOCKET BUTTON HEAD SCREW UNI EN ISO 7380 PG 10.9 ZL	M10x20		3000019164
1	1	TAG NTAG213 Norm.: - Type: N0581 Mat.: -			3000018239

INDUSTRY AUTOMATION
MANUFACTURING & SERVICE s.r.l.

	AUTHOR	DATE	APPROVAL	DESCRIPTION
B	Raffaele Ronca	27/08/2018	Raffaele Ronca	Aggiornato esponente di revisione per modifica sottoassiemi
A	Antimo Buccino	04/09/2017	Antimo Buccino	

CONSTRUCTION STANDARDS
SURFACES CONDITION ACCORDING TO **UNI ISO 302:2004**. EXCEPT FOR PARTICULAR INDICATIONS
( )

NOT QUOTED CHAMFER: **1 x 45°**
NOT QUOTED FILLET: **R 1**
TOLLERANCES ISO 8015 / UNI ISO 2768-m-K
DRAWING BY **CAD 3D**


DESCRIPTION SMA - Safety Modular Absorber
Crash Cushion
SMA 80 SW-L-L
Crash Cushion SMA 80 SW-L-L
Crash Cushion SMA 80 SW-L-L

WEIGHT KG 715.06
SCALE 1:10
SHEET / NUMBER A1 1/2
DRAWING N. D56270000 **ESP.** B

THIS DRAW IS SUBJECTRY AMS s.r.l. CONFIDENTIAL PROPERTY (ARTICLE CP 621) IT IS FORBIDDEN TO COPY, REPRODUCE OR COMMUNICATE, THE DRAWING TO THIRD PARTS WITHOUT WRITTEN CONSENT OF THE COMPANY
INDUSTRY AMS s.r.l. PROTECT ITS OWN RIGHTS ACCORDING TO LAW

0 10 20 30 40 50 60 70 80 90 100

BURNISHING	ELECTROLYTIC GALV.	HOT DIP GALVANISING	NICKEL PLATING COATING	CHEMICAL NICKEL PLATING
TEMPERING	INDUCTION QUENCHING	OIL QUENCHING	CEMENTATION	
TRATTAMENTI SUPERFICIALI O TERMICI				
RAL 9010 - WHITE	RAL 2004 - ORANGE	RAL 9006 - ALLUMINIUM	RAL 6017 - GREEN	RAL 8011 - BROWN
RAL 1021 - YELLOW	RAL 5007 - BLUE	RAL 9011 - BLACK	RAL1021-YELLOW/RAL9011-BLACK	
VERNICIATURA				

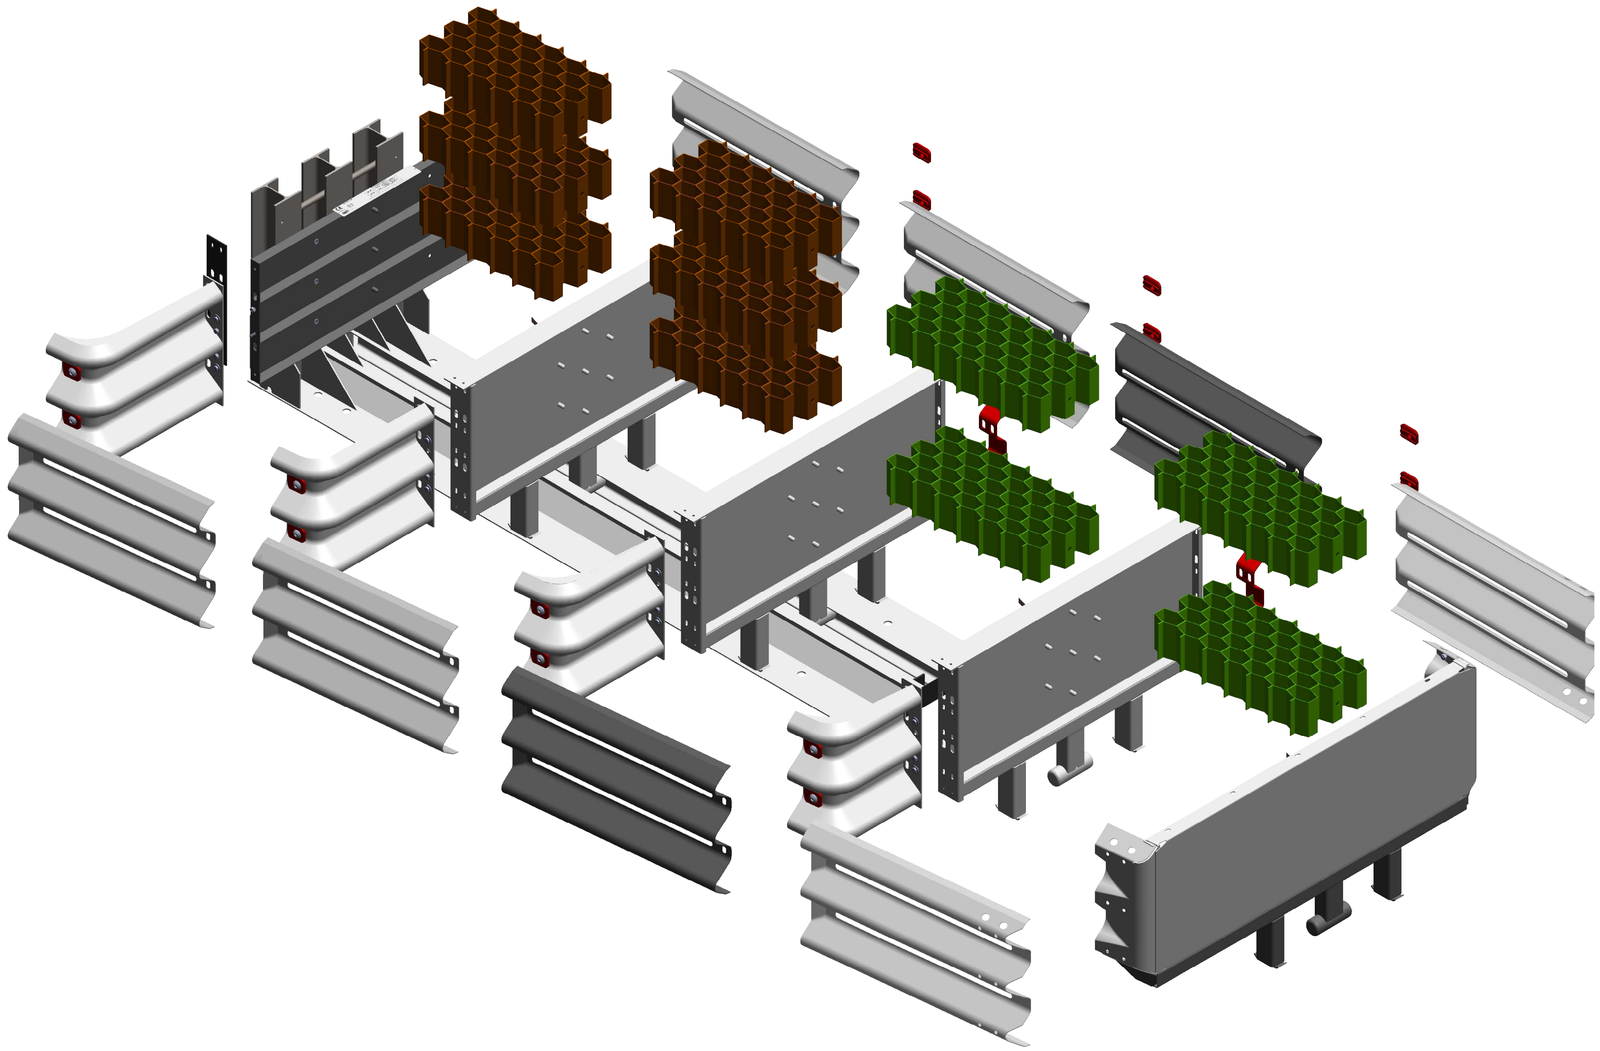

B	Raffaele Ronca	27/08/2018	Raffaele Ronca	Aggiornato esponente di revisione per modifica sottoassiemi
A	Antimo Buccino	04/09/2017	Antimo Buccino	
	AUTHOR	DATE	APPROVAL	DESCRIPTION

INDUSTRY AUTOMATION MANUFACTURING & SERVICE s.r.l.

CONSTRUCTION STANDARDS
SURFACES CONDITION ACCORDING TO **UNI ISO 302:2004**, EXCEPT FOR PARTICULAR INDICATIONS

( )

NOT QUOTED CHAMFER: **1 x 45°**
NOT QUOTED FILLET: **R 1**

TOLLERANCES ISO 8015 / UNI ISO 2768-m-K

DRAWING BY **CAD 3D**

DESCRIPTION SMA - Safety Modular Absorber
Crash Cushion
SMA 80 SW-L-L
Crash Cushion SMA 80 SW-L-L
Crash Cushion SMA 80 SW-L-L

WEIGHT KG 715.06
SCALE 1:10
SHEET / NUMBER A1 2/2

THIS DRAW IS INDUSTRY AMS s.r.l. CONFIDENTIAL PROPERTY (ARTICLE OF ED.1). IT IS FORBIDDEN TO ANYONE, TO USE, REPRODUCE OR COMMUNICATE, THE DRAWING TO THIRD PARTS WITHOUT WRITTEN CONSENT OF THE COMPANY.
INDUSTRY AMS s.r.l. PROTECT ITS OWN RIGHTS ACCORDING TO LAW

DRAWING N. D56270000 **ESP.** B

0 10 20 30 40 50 60 70 80 90 100